



Electrical Characteristics Data

(CHP Series)

●1000 hours durability characteristics (70°C 5.5V)

CHP5R5474R-TW 5.5V 0.47F/16x8x14



Testing method: Place the product in a 70°C oven, apply 5.5 V, and periodically test its performance after removal.

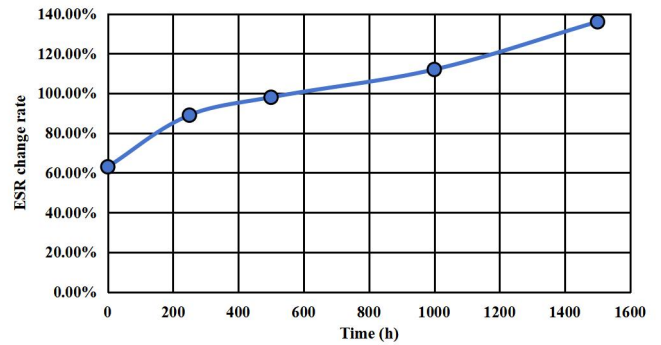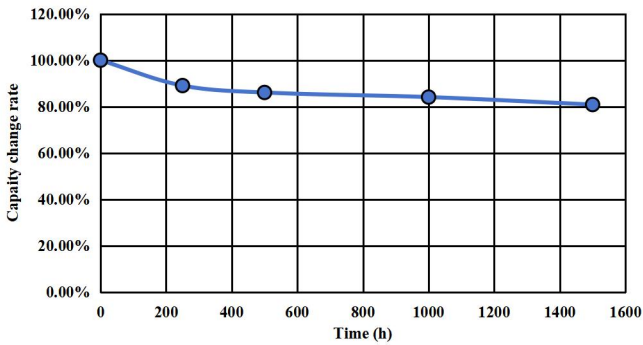

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CHP5R5474R-TW 5.5V 0.47F/16x8x14



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing

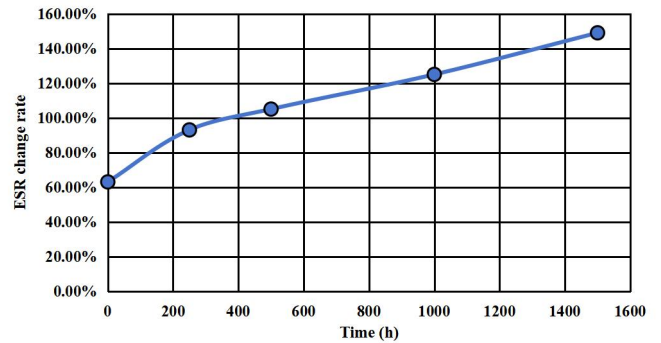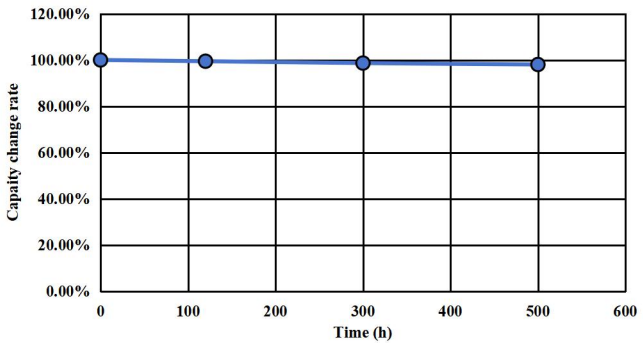

●1000-Hour High-Temperature Storage Characteristics (70°C)

CHP5R5474R-TW 5.5V 0.47F/16x8x14

Place the product in a 70°C constant convection oven without applying voltage, and periodically remove it for performance testing

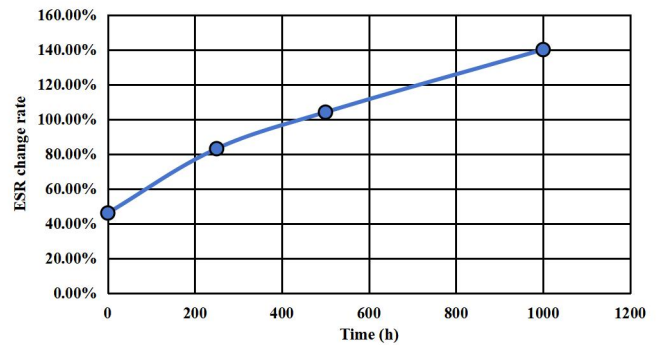
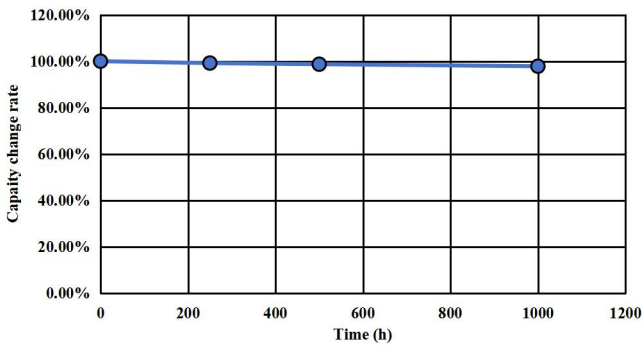


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

●High-Low Temperature Characteristics (-45 ~ +75°C)

CHP5R5474R-TW 5.5V 0.47F/16x8x14

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing

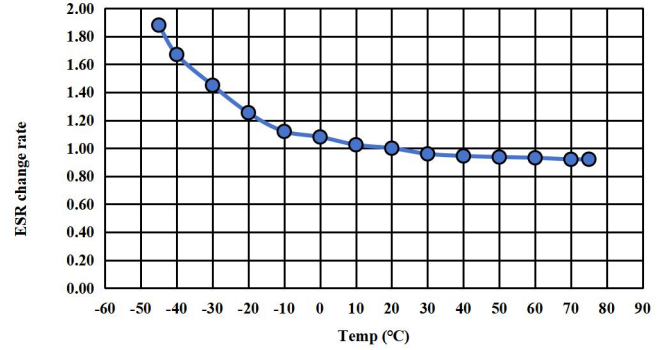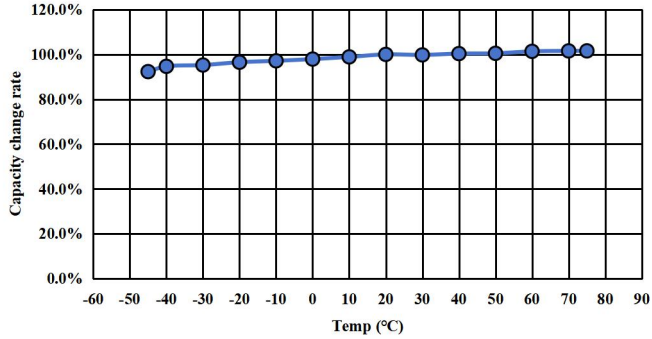

*The above data is for reference. If the model parameters you require are not available, please contact CDA