



# Electrical Characteristics Data

## (CHT Series)

**●1000 hours durability characteristics (85°C 5.0V)**

CHT-5R5155R-TW 5.5V 1.5F/16x8x22



Testing method: Place the product in an 85°C oven, apply 5.0V, and periodically test its performance after removal

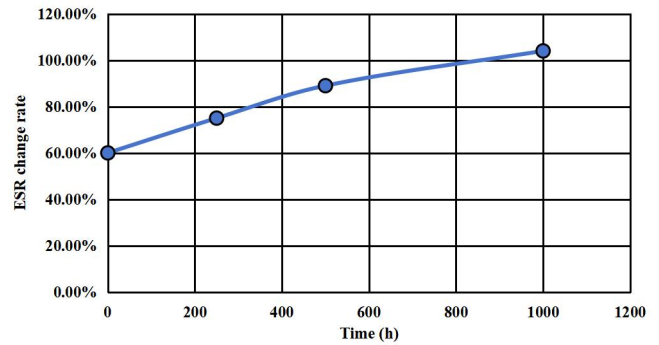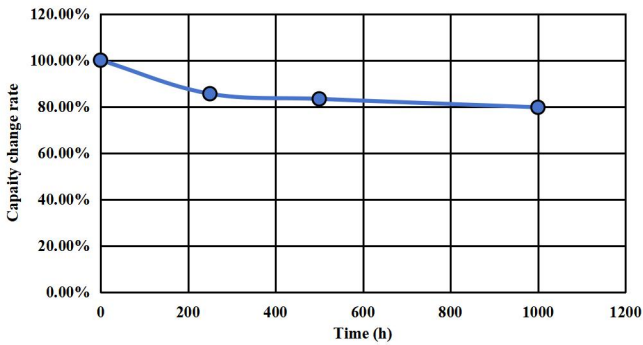

**●1000-Hour Constant Temperature and Humidity Load Characteristics (Temperature 85°C, humidity 85%)**

CHT-5R5155R-TW 5.5V 1.5F/16x8x22



Place the product in an 85°C/85%RH chamber, apply 5.0V, and periodically test its performance after removal

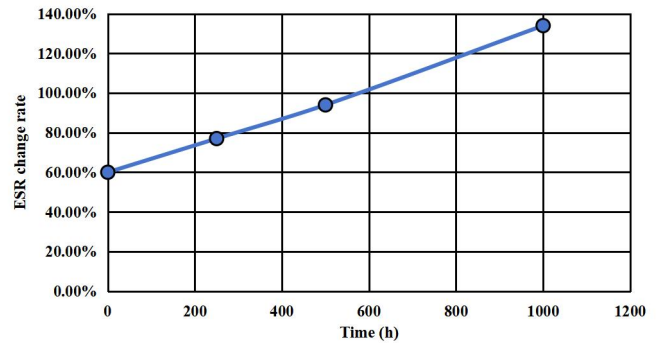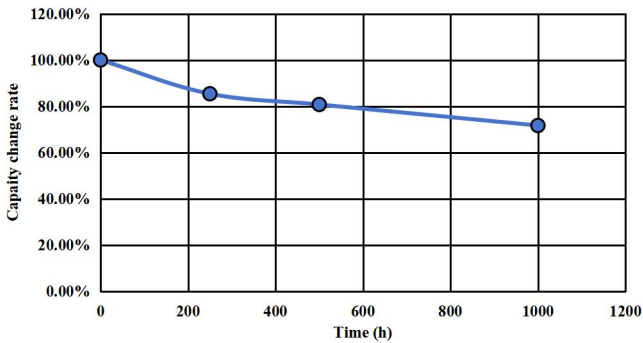

**●1000-Hour High-Temperature Storage Characteristics (85°C)**

CHT-5R5155R-TW 5.5V 1.5F/16x8x22

Place the product in an 85°C constant convection oven without applying voltage, and periodically remove it for performance testing

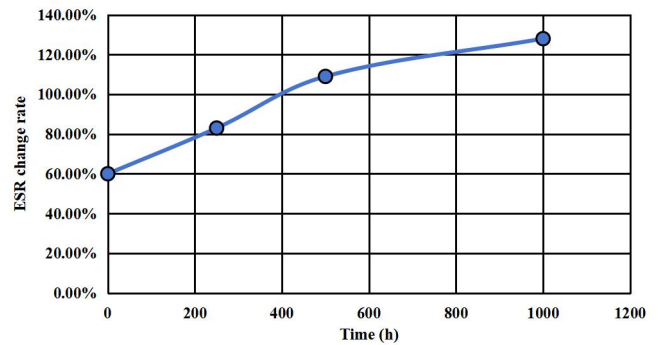
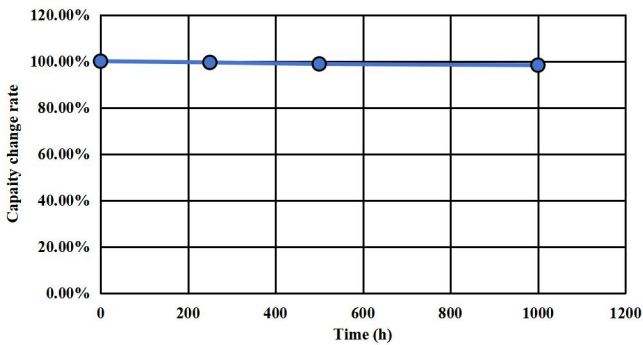


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

**●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)**

CHT-5R5155R-TW 5.5V 1.5F/16x8x22



Store the product in a 40°C/95%RH constant temperature and humidity chamber and periodically remove it for performance testing

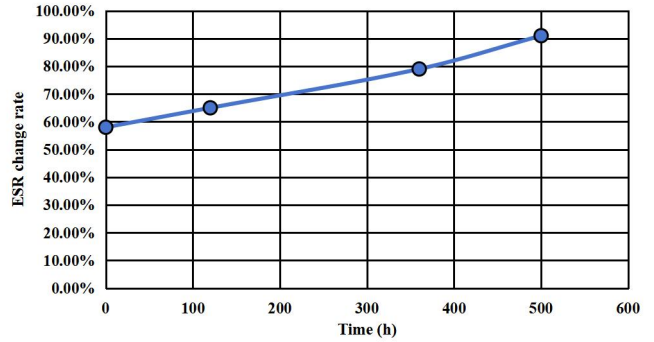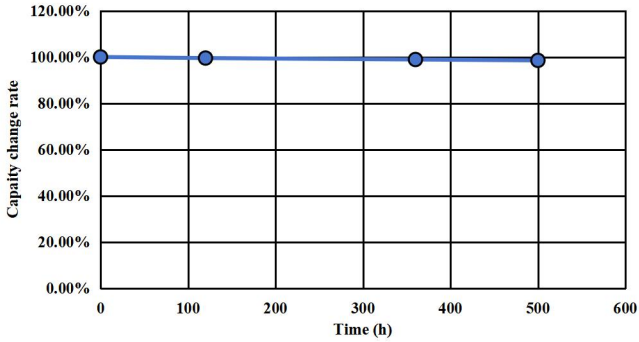

**●High-Low Temperature Characteristics (-45 ~ +85°C)**

CHT-5R5155R-TW 5.5V 1.5F/16x8x22

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing

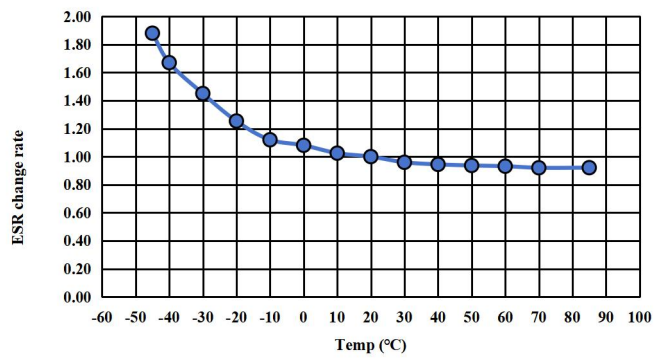
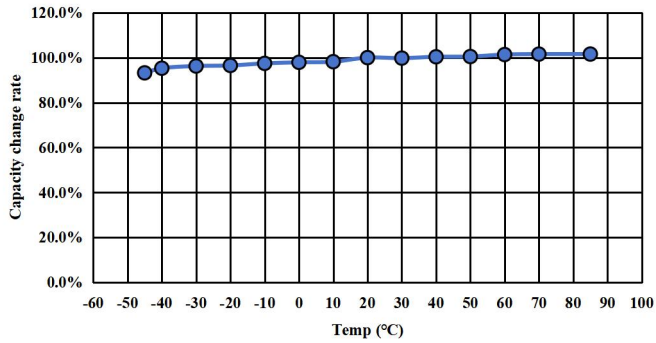


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

●1000 hours durability characteristics (85°C 5.0V)

CHT-5R5255R-TW 5.5V 2.5F/20x10x22



Testing method: Place the product in an 85°C convection oven, apply a 5.0V voltage, and periodically remove it for performance testing

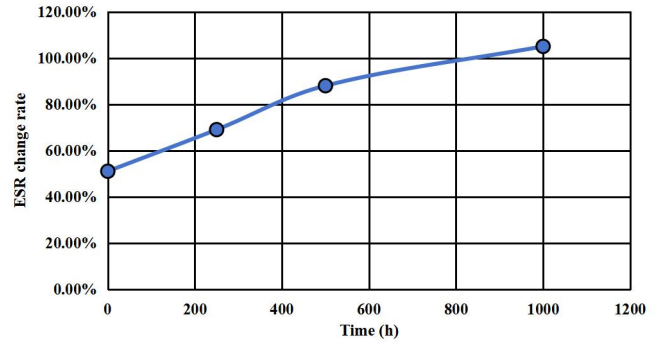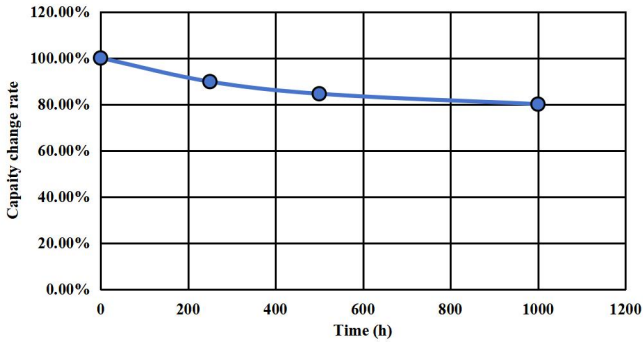

●1000-Hour Constant Temperature and Humidity Load Characteristics (Temperature 85°C, humidity 85%)

CHT-5R5255R-TW 5.5V 2.5F/20x10x22



Place the product in an 85°C/85%RH chamber, apply 5.0V, and periodically test its performance after removal

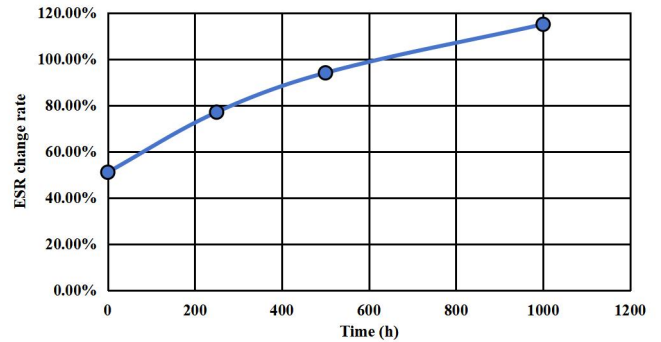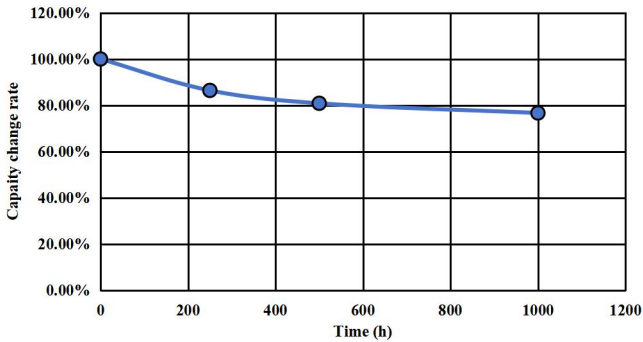

●1000-Hour High-Temperature Storage Characteristics (85°C)

CHT-5R5255R-TW 5.5V 2.5F/20x10x22

Place the product in an 85°C oven without voltage, and periodically test its performance after removal

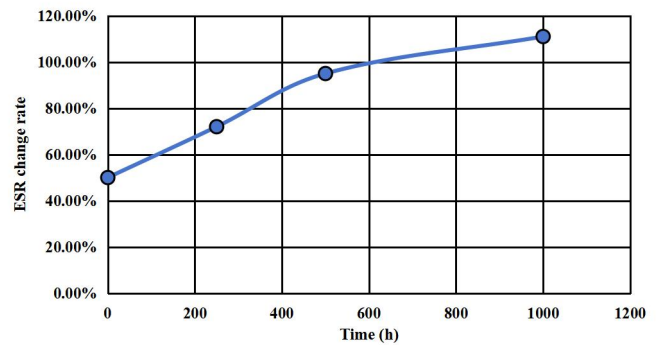
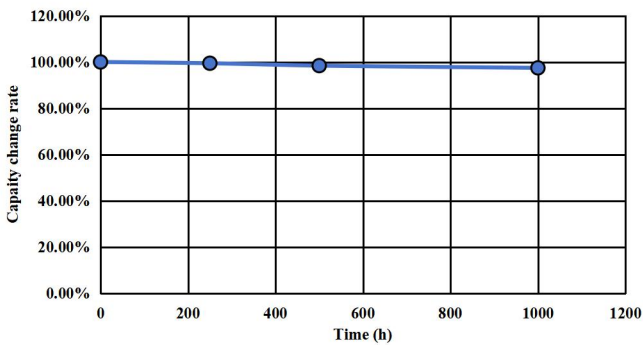


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

**●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)**

CHT-5R5255R-TW 5.5V 2.5F/20x10x22



Place the product in a 40°C/95%RH chamber and periodically test its performance after removal

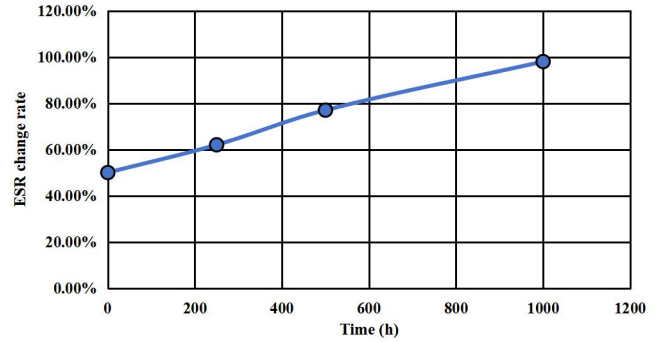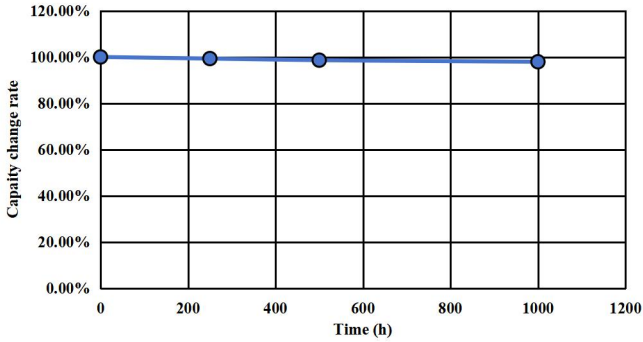

**●High-Low Temperature Characteristics (-45 ~ +85°C)**

CHT-5R5255R-TW 5.5V 2.5F/20x10x22

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing

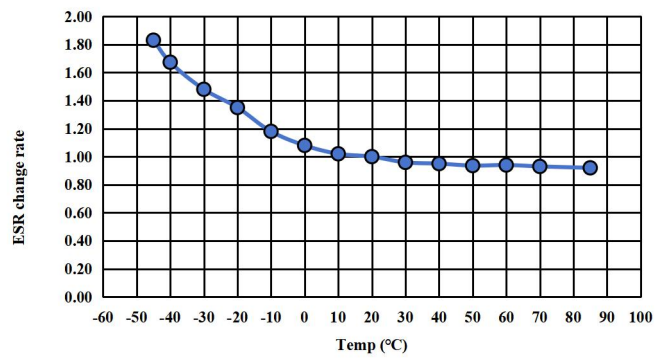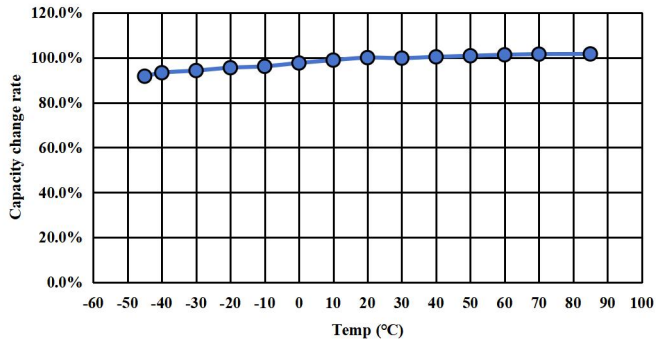

\*The above data is for reference. If the model parameters you require are not available, please contact CDA