



Electrical Characteristics Data

(CHV Series)

●1000 hours durability characteristics (65°C 2.7V)

CHV-2R7107R-TW 2.7V 100F/22x45



Testing method: Place the product in a 65°C convection oven, apply a 2.7V voltage, and periodically remove it for performance testing

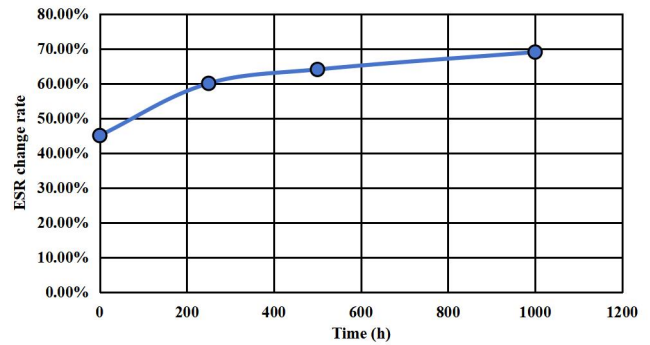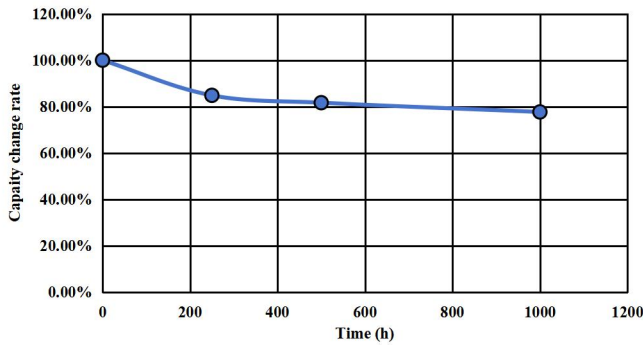

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CHV-2R7107R-TW 2.7V 100F/22x45



Store the product in a 40°C/95%RH constant temperature and humidity chamber and periodically remove it for performance testing

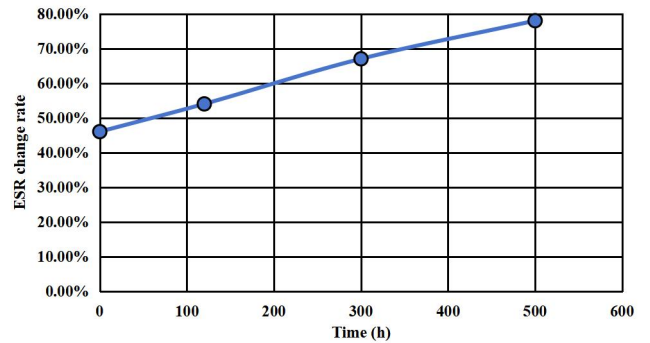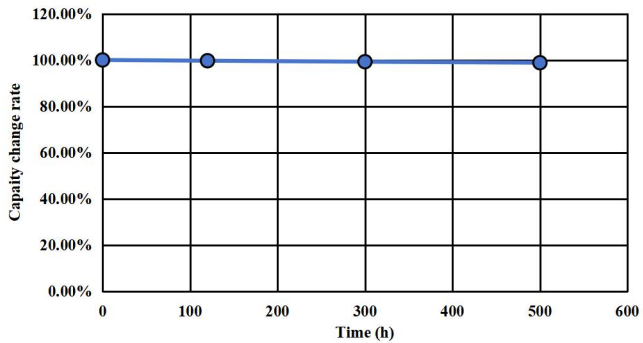

●1000-Hour High-Temperature Storage Characteristics (65°C)

CHV-2R7107R-TW 2.7V 100F/22x45

Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing

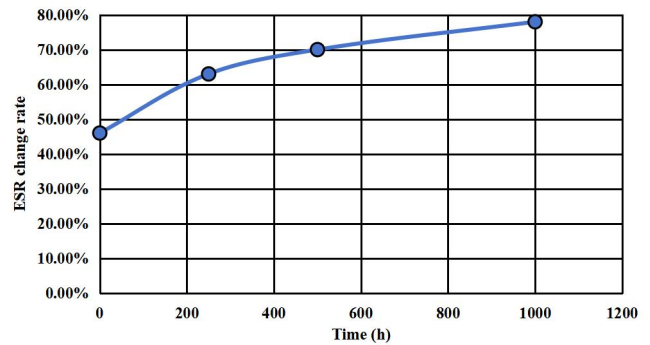
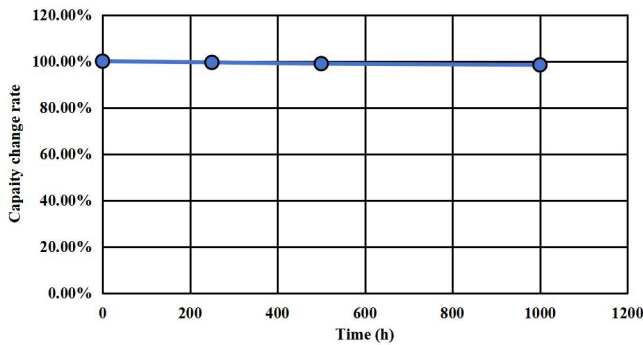


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

●High-Low Temperature Characteristics (-45 ~ +75°C)

CHV-2R7107R-TW 2.7V 100F/22x45

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing

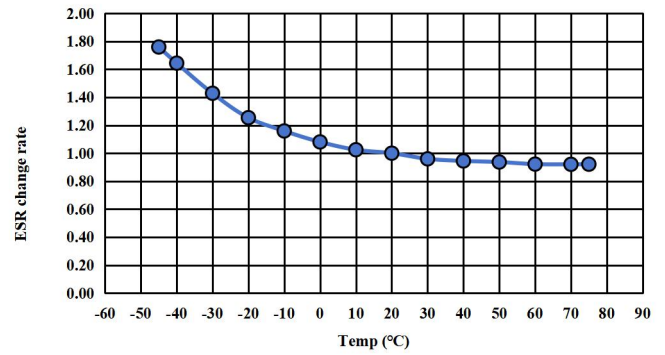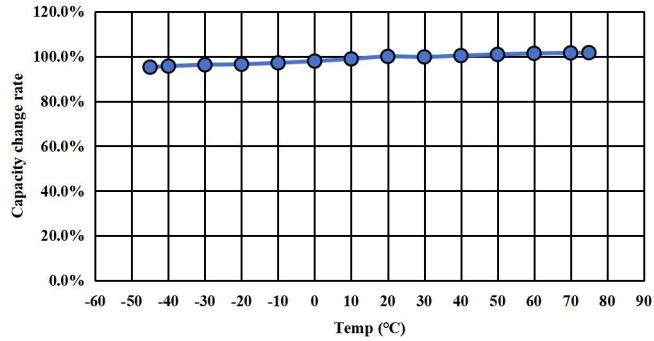

*The above data is for reference. If the model parameters you require are not available, please contact CDA