



Electrical Characteristics Data

(CXHP Series)

●1500 hours durability characteristics (70°C 2.7V)

CXHP2R7106R-TW 2.7V 10F/10x25



Place the product in an 70°C temperature chamber, apply a voltage of 2.7V. Periodically remove the product for performance testing.

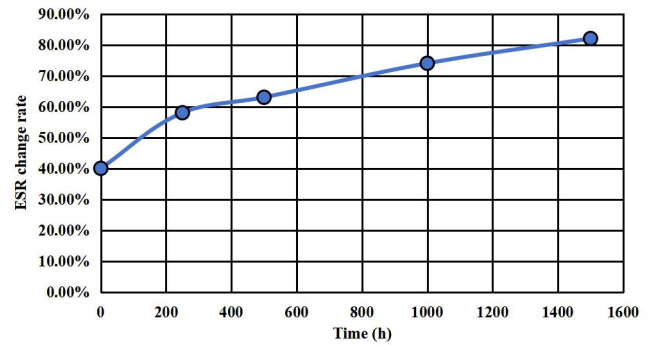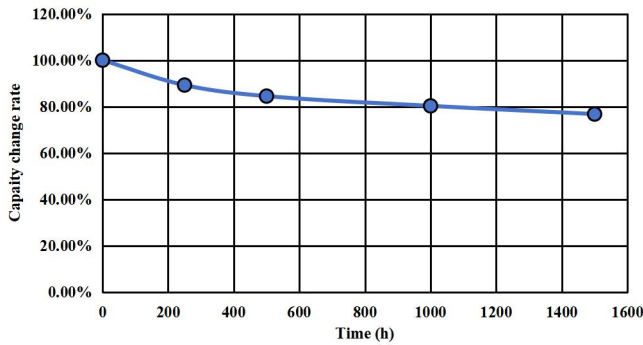

●500 hours constant temperature and humidity load characteristics (Temperature 40°C, humidity 95%)

CXHP2R7106R-TW 2.7V 10F/10x25



Place product in 40°C/95%RH chamber, periodically retrieve for performance testing

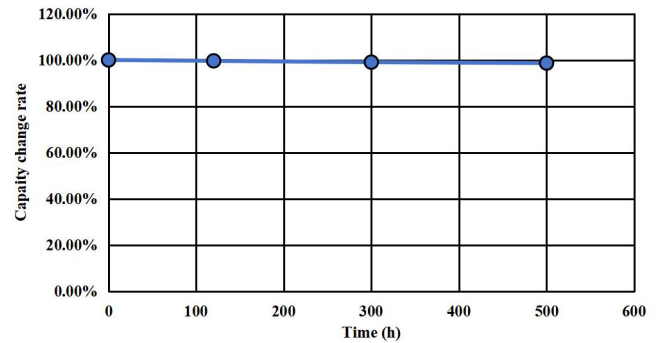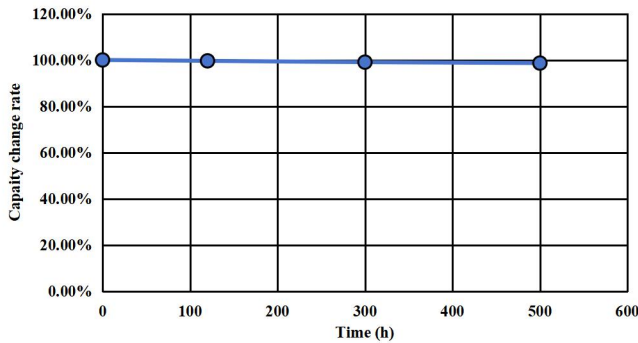

●High-Low Temperature Characteristics (-45 ~ +75°C)

CXHP2R7106R-TW 2.7V 10F/10x25

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing

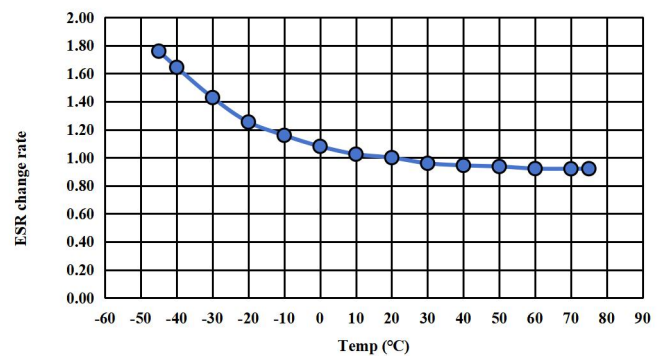
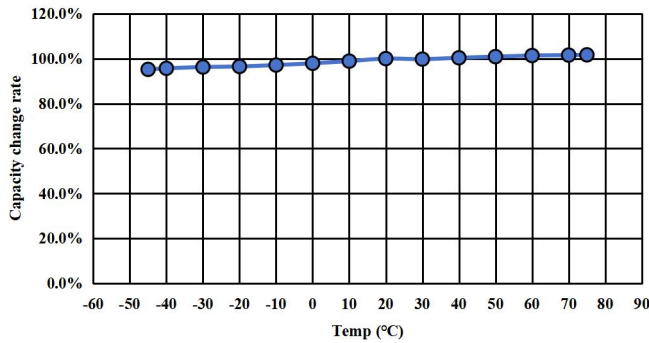


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

•1500 hours durability characteristics (70°C 2.7V)

CXHP2R7206R-TW 2.7V 20F/12.5x25



Testing method: Place the product in a 70°C oven, apply 2.7V, and periodically test its performance after removal

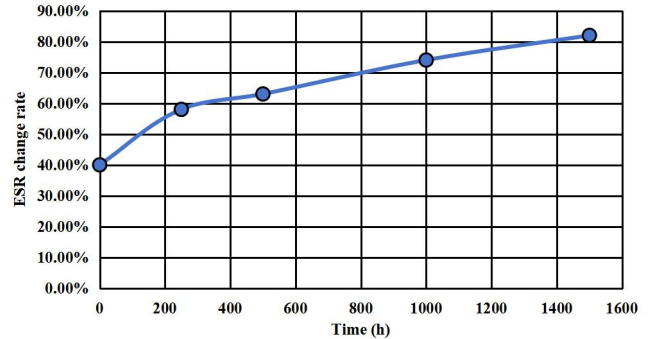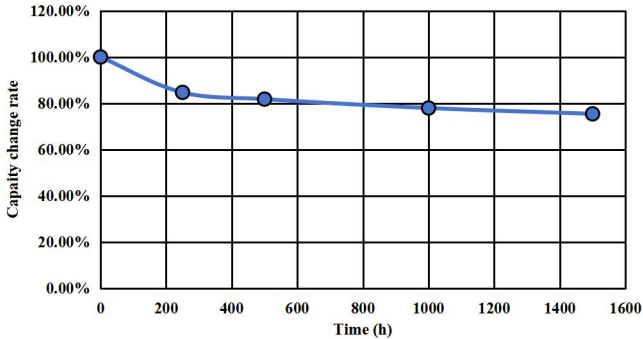

•1500-Hour High-Temperature Storage Characteristics (70°C)

CXHP2R7206R-TW 2.7V 20F/12.5x25



Place the product in a 70°C constant convection oven without applying voltage, and periodically remove it for performance testing.

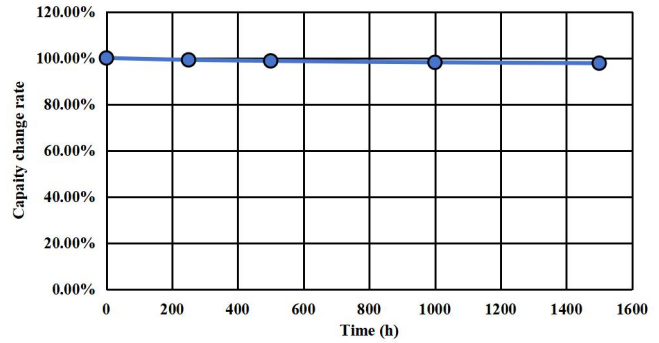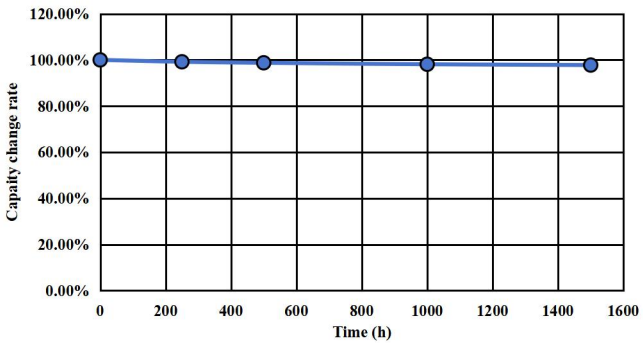

●1500 hours durability characteristics (70°C 2.7V)

CXHP2R7406R-TWX 2.7V 40F/12.5x46



Testing method: Place the product in a 70°C oven, apply 2.7V, and periodically test its performance after removal.

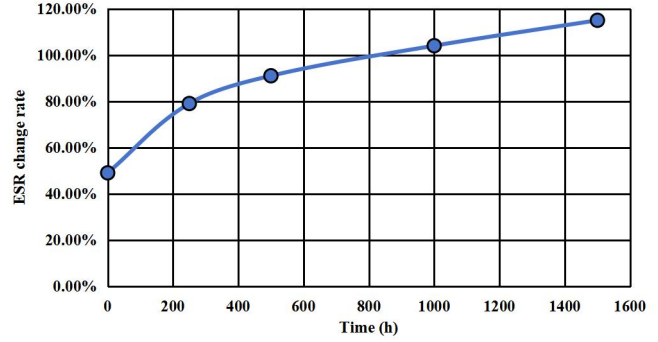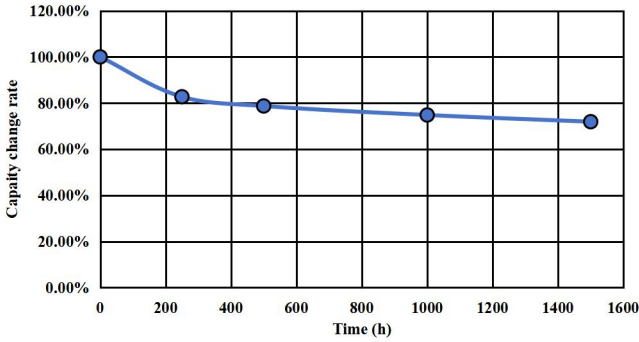

●1500 小时高温存储特性 (70°C)

CXHP2R7406R-TWX 2.7V 40F/12.5x46



Place the product in a 70°C constant convection oven without applying voltage, and periodically remove it for performance testing.

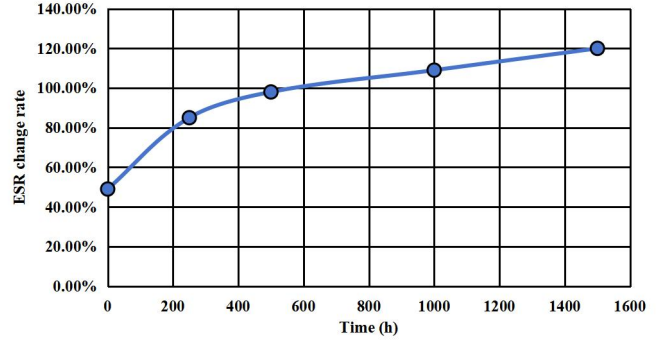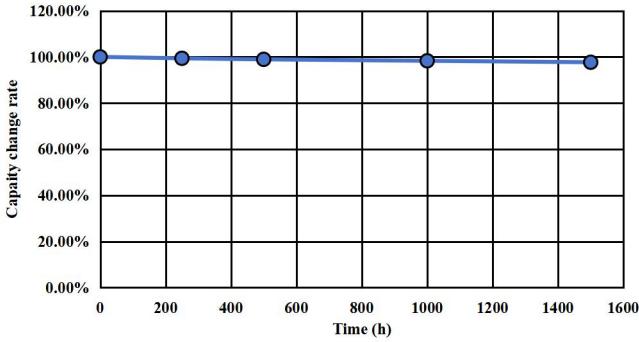

●1000 hours durability characteristics (70°C 2.7V)

CXHP2R7304R-TWX 2.7V 0.3F/4x10

Testing method: Place the product in a 70°C oven, apply 2.7V, and periodically test its performance after removal.

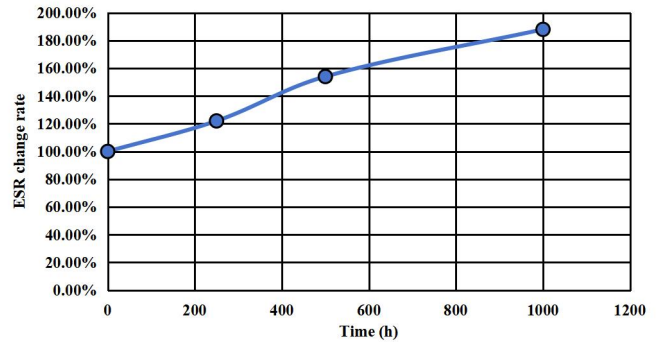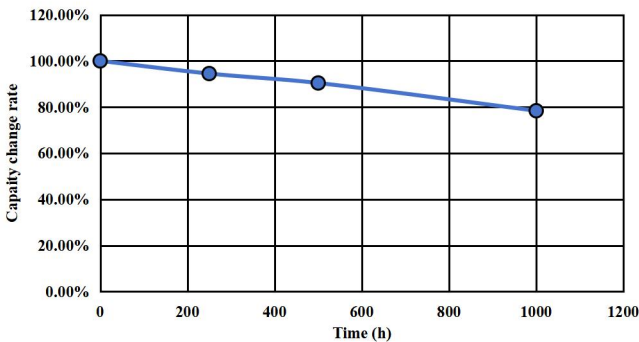

*The above data is for reference. If the model parameters you require are not available, please contact CDA